


NOTES:

1. This point must be higher than the max water level in you tank, if the max water level is higher than the height of stacks.
2. Outlet of minimum flow must not be submerged in water.
3. Second dripper required for stacks of more than 5 planters.
4. Optional mixing tank to avoid climbing to top of tank to add nutrients.
5. PVC to hose valve has 1/2 inch NPT connection and requires a 1/2 inch PVC female adapter to connect.

GREEN AGE FARMS LTD

GENERAL ARRANGEMENT FOR
EXTERNAL PUMP INSTALLATION
MR.STACKY SYSTEM

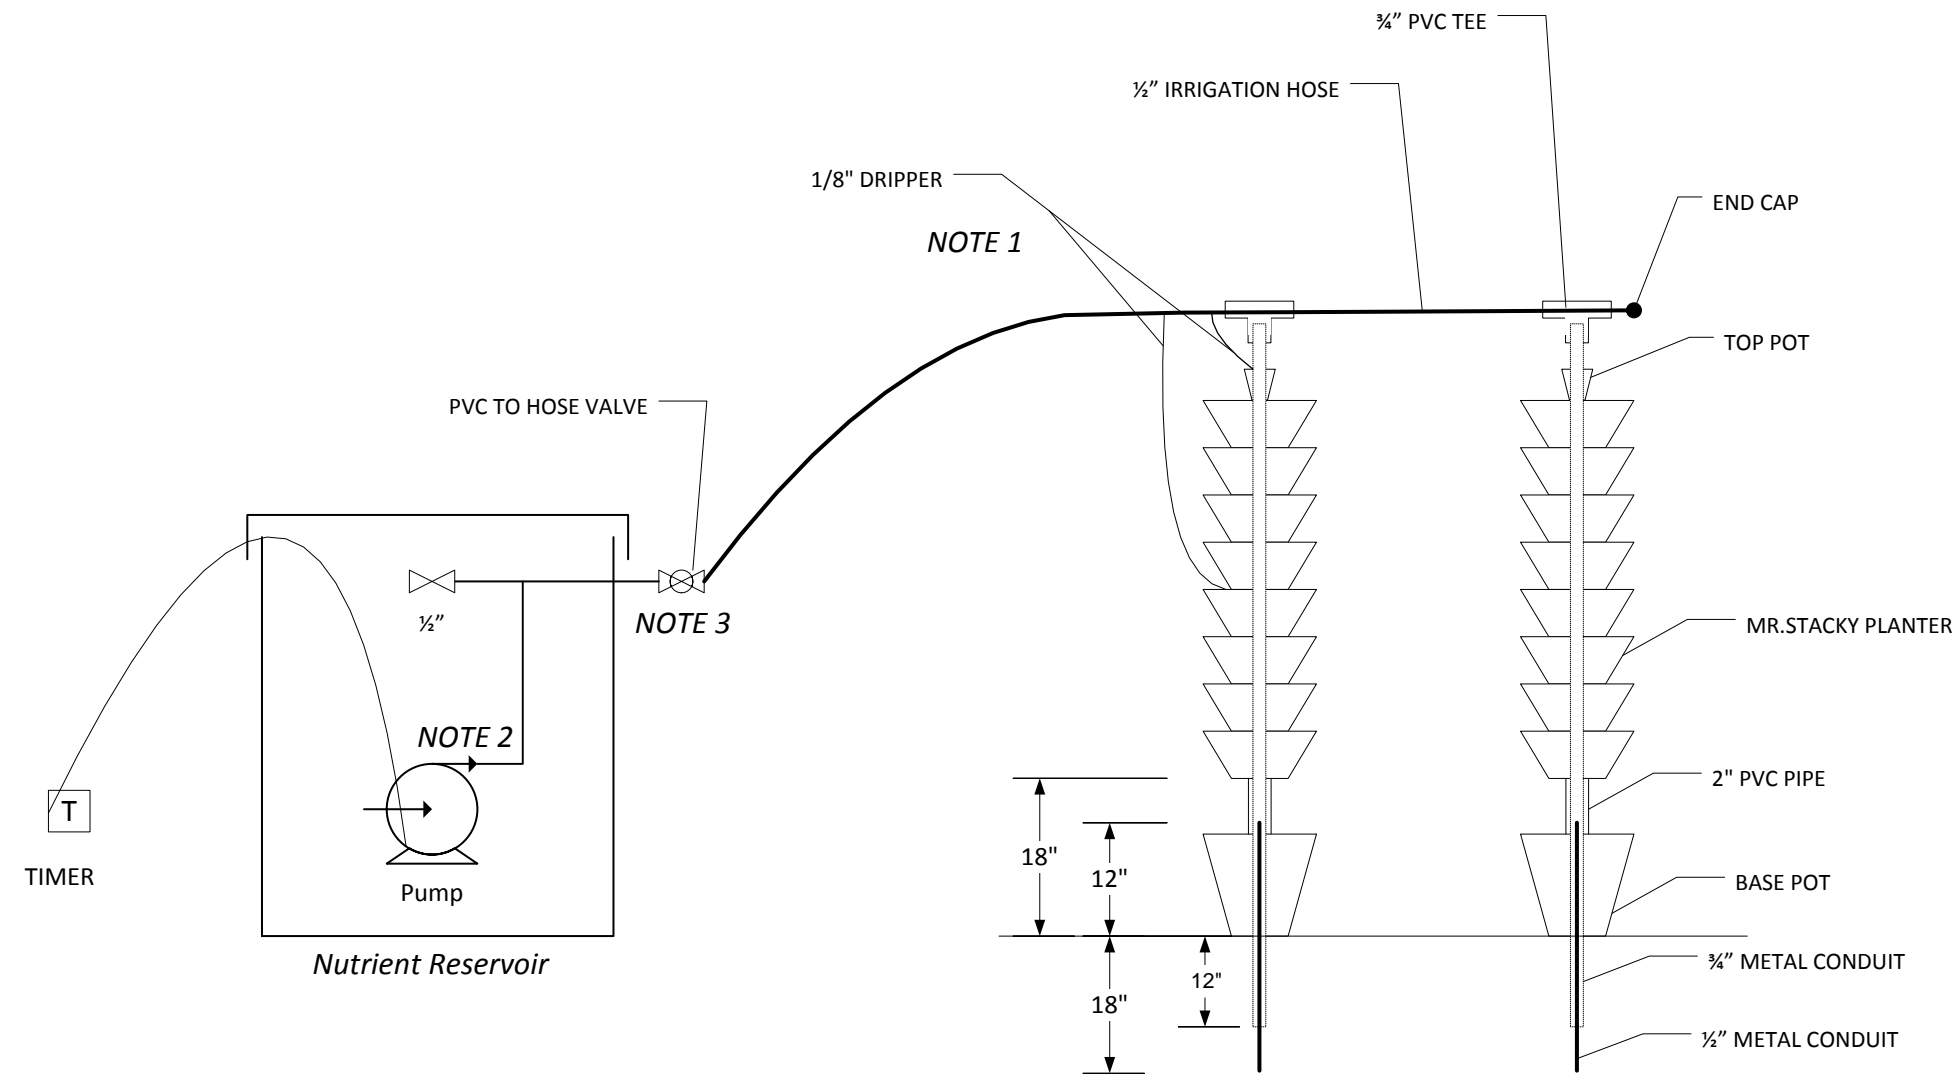

NOTES:

1. Second dripper required for stacks of more than 5 planters.
2. Pump discharge requires a 1/2 inch PVC male adapter to connect to PVC piping.
3. PVC to hose valve has 1/2 inch NPT connection and requires a 1/2 inch PVC female adapter to connect.

GREEN AGE FARMS LTD

**GENERAL ARRANGEMENT FOR
SUBMERSIBLE PUMP INSTALLATION
MR. STACKY SYSTEM**